


ASTM D638 A TESTING FIXTURE


TENSILE PROPERTIES OF PLASTICS

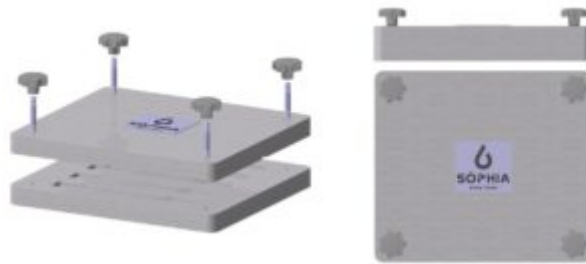

ASTM D638 A Testing Fixture

The fixture was designed in relation to the test method expressed in ASTM D638 designation. This method has been realized to produce tensile properties data for the control and specification of the plastic materials. The collection of these data is useful for the qualitative characterization and for research and development. This test method is used for the determination of the tensile properties of unreinforced and reinforced plastics in the form of standard dumbbell-shaped test specimens tested under defined conditions of pre-treatment, temperature, humidity, and testing machine speed. This method is useful for testing the materials which have a thickness up to 14 mm (0.55 in.). However, for test specimens in the form of thin sheets, including film less than 1.0 mm (0.04 in.) in thickness, ASTM D882 standard is the preferred test method. The materials with a thickness greater than 14 mm (0.55 in.) are reduced by machining.

Data useful for plastics engineering design purposes may be provided by tensile. In order to assure high degree of sensitivity e correct to rate of straining is necessary to control environmental conditions. The test method cannot be validated for applications involving load-time scales or environments widely different from those of the test method.

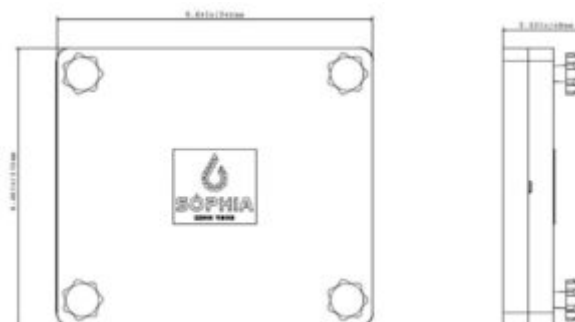

ASTM D638 A Testing Fixture - Drawing

Sòphia High Tech S.r.l.

Legal Office: Viale Manzoni 113 - int.2 80040 - Poggiomarino (NA) - Italy
Headquarter: Via Romani 228, 80048 - Sant'Anastasia (NA) - Italy
Tel: +39 0823504748 **Fax:** +39 0818651210
mail: info@sophiahightech.com **P.IVA/VAT:** 07547751219
 www.sophiahightech.com

Sòphia CZ S.r.o.


Headquarter / Legal Office: Jičínská 226/17, Praha 3 130 00 - Czech Republic
Tel: +420 773462127
mail: info@sophiahightech.com
IC: 05617979
 www.sophiahightech.com

ASTM D638 A TESTING FIXTURE

TENSILE PROPERTIES OF PLASTICS

Test Standard	ASTM D 638 / no ISO equivalent
Mass	5.50 kg
Temperature Range	da -150 °C a 250 °C
Specimen Thickness	Up to 5 mm
Specimen Width	See Designation D368 Type I
Specimen Length	See Designation D368 Type I

The test specimen shall be held preventing the slippage relative to the grips. Grip surfaces that are deeply scored or serrated with a pattern similar to those of a coarse single-cut file, serrations about 2.4 mm (0.09 in.) apart and about 1.6 mm (0.06 in.) deep, have been found suitable for most thermoplastics. Finer serrations have been found satisfactory for harder plastics, such as the thermosetting materials. Reducing the cross-sectional area of the specimen may also be effective.

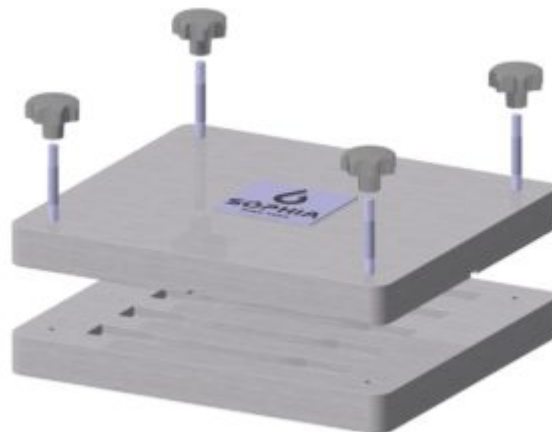

ASTM D638 A Testing Fixture - Assembly

☛ SOPHIA High Tech S.r.l.

Legal Office: Viale Manzoni 113 - int.2 80040 - Poggiomarino (NA) - Italy
Headquarter: Via Romani 228, 80048 - Sant'Anastasia (NA) - Italy
Tel: +39 0823504748 **Fax:** +39 0818651210
mail: info@sophiahightech.com **P.IVA/VAT:** 07547751219
www.sophiahightech.com

☛ SOPHIA CZ S.r.o.

Headquarter / Legal Office: Jičínská 226/17, Praha 3 130 00 - Czech Republic
Tel: +420 773462127
mail: info@sophiahightech.com
IC: 05617979
www.sophiahightech.com

ASTM D638 A TESTING FIXTURE

TENSILE PROPERTIES OF PLASTICS



ASTM D 638 testing Fixture - Application

Referenced Documents

ASTM Standards

D229 Test Methods for Rigid Sheet and Plate Materials Used for Electrical Insulation

D412 Test Methods for Vulcanized Rubber and Thermoplastic Elastomers-Tension

D618 Practice for Conditioning Plastics for Testing

D651 Test Method for Test for Tensile Strength of Molded Electrical Insulating Materials

D882 Test Method for Tensile Properties of Thin Plastic Sheeting

D883 Terminology Relating to Plastics

D1822 Test Method for Tensile-Impact Energy to Break Plastics and Electrical Insulating Materials

D3039/D3039M Test Method for Tensile Properties of Polymer Matrix Composite Materials

Sòphia High Tech S.r.l.

Legal Office: Viale Manzoni 113 - int.2 80040 - Poggiomarino (NA) - Italy
Headquarter: Via Romani 228, 80048 - Sant'Anastasia (NA) - Italy
Tel: +39 0823504748 **Fax:** +39 0818651210
mail: info@sophiahightech.com **P.IVA/VAT:** 07547751219
www.sophiahightech.com

Sòphia CZ S.r.o.

Headquarter / Legal Office: Jičínská 226/17, Praha 3 130 00 - Czech Republic
Tel: +420 773462127
mail: info@sophiahightech.com
IC: 05617979
www.sophiahightech.com

ASTM D638 A TESTING FIXTURE

TENSILE PROPERTIES OF PLASTICS

D4000 Classification System for Specifying Plastic Materials

D4066 Classification System for Nylon Injection and Extrusion Materials (PA)

D5947 Test Methods for Physical Dimensions of Solid Plastics Specimens

E4 Practices for Force Verification of Testing Machines

E83 Practice for Verification and Classification of Extensometer Systems

E132 Test Method for Poissons Ratio at Room Temperature

E691 Practice for Conducting an Interlaboratory Study to Determine the Precision of a Test Method

E1012 Practice for Verification of Testing Frame and Specimen Alignment Under Tensile and Compressive Axial Force Application

ISO Standard

<li ">ISO 527-1 Determination of Tensile Properties <li ">ISO 527-1 Determination of Tensile Properties

Sòphia High Tech S.r.l.

Legal Office: Viale Manzoni 113 - int.2 80040 - Poggiomarino (NA) - Italy
Headquarter: Via Romani 228, 80048 - Sant'Anastasia (NA) - Italy
Tel: +39 0823504748 **Fax:** +39 0818651210
mail: info@sophiahightech.com **P.IVA/VAT:** 07547751219
www.sophiahightech.com

Sòphia CZ S.r.o.

Headquarter / Legal Office: Jičínská 226/17, Praha 3 130 00 - Czech Republic
Tel: +420 773462127
mail: info@sophiahightech.com
IC: 05617979
www.sophiahightech.com